



## TECHNICAL DESCRIPTION

Number of modules	3
Type of modules	ComfortLine
Dimensions of modules	9,000x3,600x3,400 mm
Area	97 m <sup>2</sup>
Internal height	2.565 m
Length of manufacture	2 weeks
Length of assembly	1 weeks
Windows	Aluminium, double glazing, external electric blinds, marquise
External doors	Aluminium, double glazing
Interior – walls	Gypsum fibreboard with painting
Interior - floors	Tiles
Facade	Thermowood wooden facade / PUR panel
Heating	Fireplace heater, electric heaters
Fire resistance	30 min.
Equipment	Mini kitchen, stainless chimney

## Description

Golf auxiliary rooms assembled from 3 ComfortLine modules with horizontal wooden facing of the front and sides and brown PUR panels on the rear building side. The windows are fitted with outside electric shades; the entry is protected with a marquise.


Inner walls and partitions are from Fermacell gypsum fibreboards. Heating is provided with electric heaters in combination with fireplace heaters. The scope of the project included a chimney from stainless steel. The rooms fulfill the requirements for energy-saving buildings (C shield).

## The Golf Club Pegas

Site location	Potočná 208, Lozorno, Slovakia
Implementation date	August 2011
The delivery included:	Upper building
The delivery didn't include:	Predecessor activities

# The Golf Club in Lozorno

# KOMA

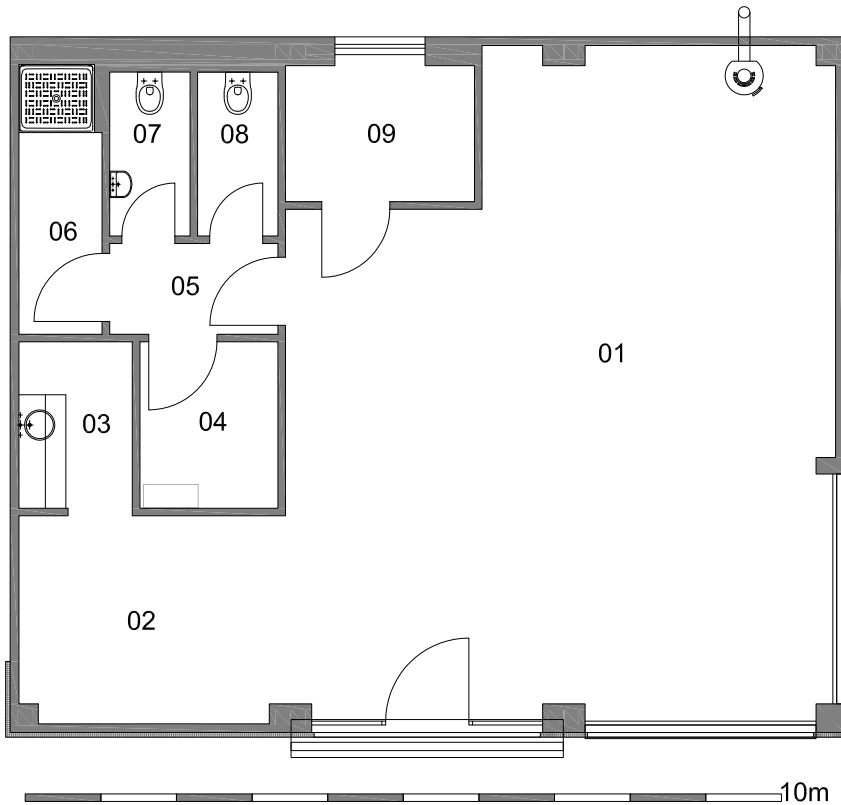

## LEGEND

01	CLUB
02	BAR
03	KITCHEN
04	UTILITY ROOM
05	LOBBY
06	SHOWER
07	TOILET
08	TOILET
09	OFFICE

